

UNIVERSITY OF CALIFORNIA, SANTA CRUZ  
 BOARD OF STUDIES IN COMPUTER ENGINEERING




CMPE-242:  
 APPLIED FEEDBACK CONTROL

HOMEWORK #1  
 DUE 14-JAN-2013

1. *Differential Equations:* Consider the system defined by:

$$m\ddot{x} + b\dot{x} = F(t) \text{ where } x(0) = 0 \text{ and } \dot{x}(0) = 0.$$

- Find the step response of this system. That is, what is  $x(t)$  if  $F(t) = \mathbf{1}(t)$ . Do this in a way that does NOT use Laplace Transforms. For example, you can solve the equation using the techniques you learning in your first DiffEq class (i.e.: find the forced and natural parts of the response, etc.). So that you might check this, the answer is  $x(t) = \frac{1}{b} \left( t - \frac{m}{b} \left[ 1 - e^{-\frac{b}{m}t} \right] \right)$ .
  - The impulse response of the system,  $h(t)$ , is the derivative of the step response. What is  $h(t)$ ?
  - Compute the step response using the convolution integral  $x(t) = \int_0^t u(\tau)h(t - \tau)d\tau$ , where  $u(\tau) = 1$ .
  - What is the transfer function,  $\frac{X(s)}{F(s)}$ , of this system? What is the Laplace Transform of a step input,  $U(s)$ ?
  - Find the step response,  $x(t)$ , by taking the inverse Laplace Transform of  $X(s)$ . Use the table of Laplace Transforms.
  - Repeat part (e), but first do a partial fraction expansion of  $X(s)$ . Note that there are repeated roots (see Appendix A of FPE).
2. *Block diagram reduction:* Write down the transfer function  $[Y(s)/U(s)]$  of the block diagram below:

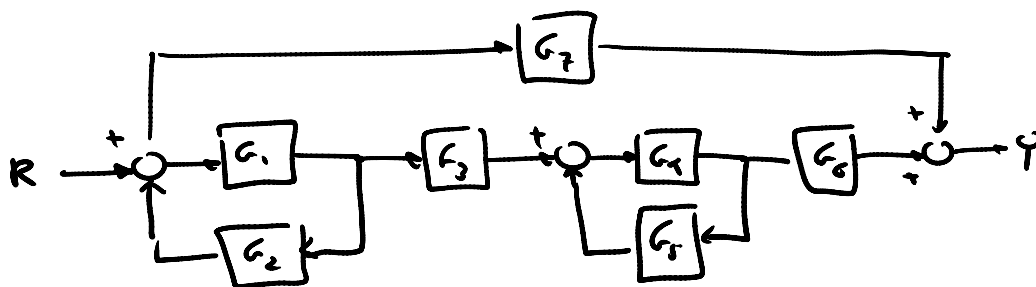


3. *Laplace transform*: find the time function for each of the following using the Inverse Laplace Transforms and partial fraction expansion (look at Appendix A for distinct complex roots):

a.  $F(s) = \frac{2}{s(s+2)}$


b.  $F(s) = \frac{3s+2}{s^2+4s+20}$

c.  $F(s) = \frac{2(s+2)}{(s+1)(s^2+4)}$

4. *Transfer Functions*: Given the following mass-spring system, derive the transfer function from the position of the leftmost of the masses to the forcing function  $X_1(s)/F(s)$ :

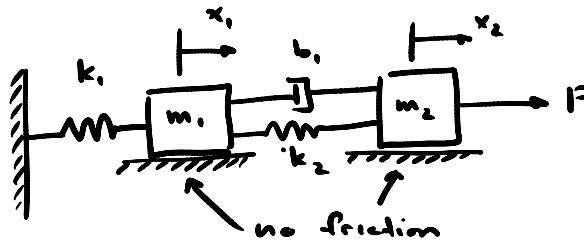

5. *Transfer Functions*: Given the following simple electrical system, derive the transfer function from the input voltage to the output voltage  $[V_2(s)/V_1(s)]$ :

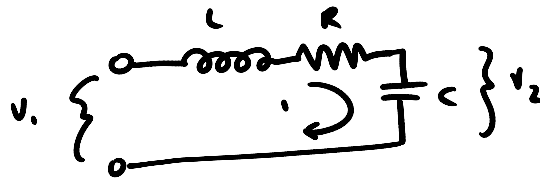

6. *Dynamic Response*: Given the following third order system:

$$H(s) = \frac{\alpha\omega_n^2}{(s + \alpha)(s^2 + 2\zeta\omega_n s + \omega_n^2)}$$

The response to a unit step ( $U(t)=\mathbf{1}(t)$ ) is:

$$y(t) = 1 + Ae^{-\alpha t} + Be^{-\sigma t} \sin(\omega_d t - \varphi)$$

where:

$$A = \frac{-\omega_n^2}{(\omega_n^2 - 2\zeta\omega_n\alpha + \alpha^2)}$$

$$B = \frac{\alpha}{\sqrt{(\omega_n^2 - 2\zeta\omega_n\alpha + \alpha^2)(1 - \zeta^2)}}$$

$$\varphi = \text{TAN}^{-1} \frac{\sqrt{1 - \zeta^2}}{-\zeta} + \text{TAN}^{-1} \frac{\omega_n \sqrt{1 - \zeta^2}}{\alpha - \zeta\omega_n}$$

- Which term dominates as  $\alpha$  gets large?
- Which term dominates as  $\alpha$  gets small?
- Approximate A and B for small values of  $\alpha$ .
- Assume that  $\omega_n = 1$  and  $\zeta = 0.707$ , plot the step response for several values of  $\alpha$ . Use MATLAB's *step* command (could you use *impulse*? How?) Comment on where the extra pole becomes unimportant.